



EXTERIOR COLLECTION

M211

FLOOD LIGHT

OVERVIEW

Lumens

Delivers up to 127 lumens per watt

CRI

70+

CCT

3000K, 3500K, 4000K, 5000K

Voltage

120-277V, 347-480V

Dimming

0-10V, 100% down to 10%

Operating Temperature

-40°F to 122°F


Projected Lifetime

118,000 Hours (L70);
72,000 Hours (L80)

Suitable Location

Wet (IP65)

Finishes



Custom colors available.

Project _____ Date _____

Catalog # _____ Quantity _____ Type _____



Illuminate pathways, accentuate architectural features, and create an ambiance that enhance the beauty of your property. M211 is a high-quality flood light designed for durability and energy efficiency, ensuring long-lasting performance. Ideal for buildings, backyards, parks, signs, sports fields, and other general applications. Also suitable for accent, facade, landscape, pathway, and security lighting.

Features

- Durable Construction: Rugged cast aluminum housing with a round back design that shields internal components.
- Secure Enclosure: Die-cast aluminum door with twin-screw closure and a hinged bottom for easy access.
- Versatile Mounting: 1/2" universal swivel knuckle with multiple mounting adapters for flexibility.
- Optimal Lighting: Wide, uniform beam ideal for signs, facades, and small areas.
- Durable Finish: Protective powder-coated finish.

10 YR

Warranty
Available*

BAA

Compliant
Available

M211 MEDIUM ROUND FLOOD LIGHT



ORDERING WORKSHEET

Contact sales representative to order.

Sample Code: M2112050U5SB

M211									
SERIES*	OUTPUT ¹	CCT	VOLTAGE	OPTICS	FINISH	MOUNTING	CONTROL	WARRANTY	BUILD TYPE
M211 Medium Round Flood Light	20 20W / 2490	30 3000K	U 120-277V	5 Type V, Standard	B Bronze, Standard	K Adjustable Knuckle, Heavy Duty	P Photocell ³	10 10 Year Option	BA BAA Compliant
	30 30W / 3480	35 3500K	H 347-480V	N 40° Narrow Flood	K Black	S Slip Fitter	Blank None	Blank Standard 5 Year	Blank Standard
	40 40W / 4370	40 4000K		M 55° Medium Flood	W White	Y Yoke Mount			
	60 60W / 7010	50 5000K		W 70° Wide Flood	C Custom ²				
	80 80W / 8930								

* Consult with sales representative for custom ordering and lead time.


¹ Lumen outputs shown are for 5000K, Type V.

² Consult with sales representative for custom finishes and lead time.

³ Indicate 347V or 480V.

⁴ 5 Year Warranty is Standard unless specified.

MOUNTING

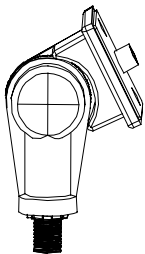

Adjustable Knuckle,
Heavy Duty (K)



Slip Fitter (S)
For 2 3/8" poles



Yoke
Mount (Y)


ACCESSORIES (Order Separately, Field Installed)



M211-PTF
Post Top Fitter
Requires Adjustable
Knuckle (K)



M211-GTF
Ground Stake
Requires Adjustable
Knuckle (K)



M211-GS
Glare Shield
Bronze Finish,
Includes Hardware



M211-WG
Wire Guide
Stainless Steel,
Includes Hardware


10 YR

Warranty
Available⁴

BAA

Compliant
Available

DIMENSIONS

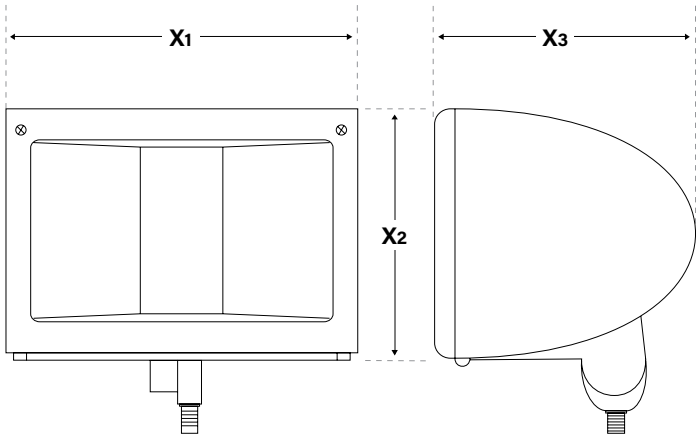

Size	
X1	11"
X2	8.5"
X3	8"

LUMEN OUTPUT

WATTAGE		5000K			
Nominal	System	TYPE V	40° (N)	55° (M)	70° (W)
20W	19W	2492	2425	2444	2441
30W	27W	3481	3416	3438	3435
40W	36W	4373	4309	4329	4326
60W	56W	7014	6938	6956	6953
80W	76W	8935	8875	8897	8891

CCT	5000K	4000K	3500K	3000K
Standard	100%	98%	95%	93%


Use above multipliers relative to the 5000K delivered lumen output of the desired optic distribution below to calculate lumen output by CCT.

PROJECTED LED MAINTENANCE

Operating Hours	0	25,000	50,000	75,000	100,000
Lumen Maintenance Factor	77°F (25°C) Ambient Outdoor Temp				
	1	0.92	0.85	0.79	0.74
	95°F (35°C) Ambient Outdoor Temp				
	1	0.88	0.78	0.70	0.62


PHOTOMETRICS

60W at 15FT

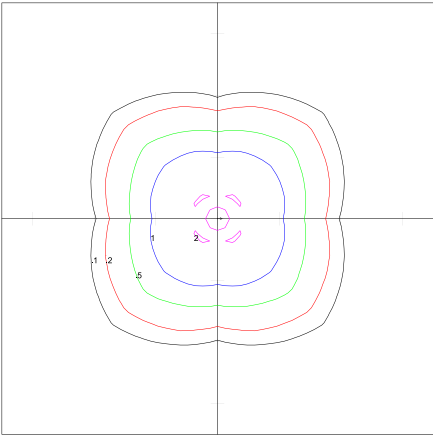


Type V • 7023 Lumens
Maximum Calculated Value: 2.17 Fc

60W at 15FT, 45° Tilt

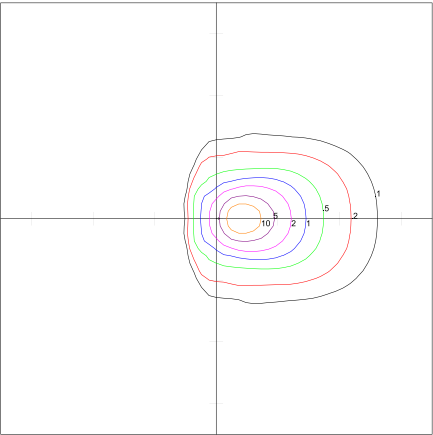


40° Optics • 7249 Lumens
Maximum Calculated Value = 18.83 Fc

60W at 15FT, 45° Tilt

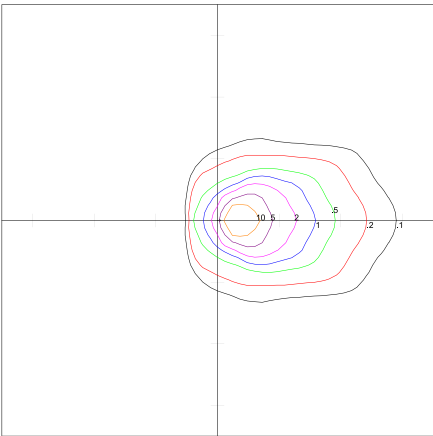

55° Optics • 7269 Lumens
Maximum Calculated Value = 19.14 Fc

60W at 15FT, 45° Tilt

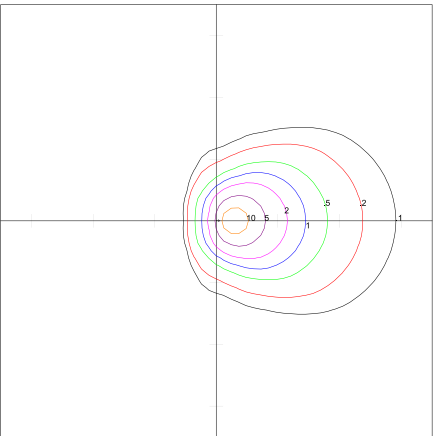

70° Optics • 7408 Lumens
Maximum Calculated Value = 14.04 Fc