

The logo features the letters 'M20' in a large, white, stylized font. The 'M' is composed of two sharp, upward-pointing triangles. The '2' is a thick, curved stroke. The '0' is a large, white, circular ring. A registered trademark symbol (®) is located to the right of the '0'. Below this, the word 'ARCHITECTURAL' is written in a white, uppercase, sans-serif font.

M20[®]
ARCHITECTURAL



Manufacturer With Over 35 Years' Experience

Since 1989, PQL, a U.S.-based company, has specialized in innovative, eco-friendly lighting across various sectors like commercial, industrial, institutional, and healthcare markets. Recently, architectural lighting has seen significant evolution, prompting PQL to introduce the M20® Architectural lineup. These top-quality luminaires are fully customizable for each project's unique needs. Our Architectural line caters to lighting professionals, offering diverse options, precise controls, and solutions meeting industry standards. With our dedicated product development team constantly innovating, our architectural luminaires provide flexibility for precise adjustments to fit your project's specifications.

Corporate HQ

Simi Valley, California

Office/Engineering

Fargo, North Dakota
Burlington, Iowa

Distribution Center

Simi Valley, California
San Diego, California
Minneapolis, Minnesota
Homewood, Illinois

Manufacturing

Baja California,
Mexico
Asia-Pacific (APAC)




INTERIOR
ARCHITECTURAL



EXTERIOR
ARCHITECTURAL

INTERIOR ARCHITECTURAL

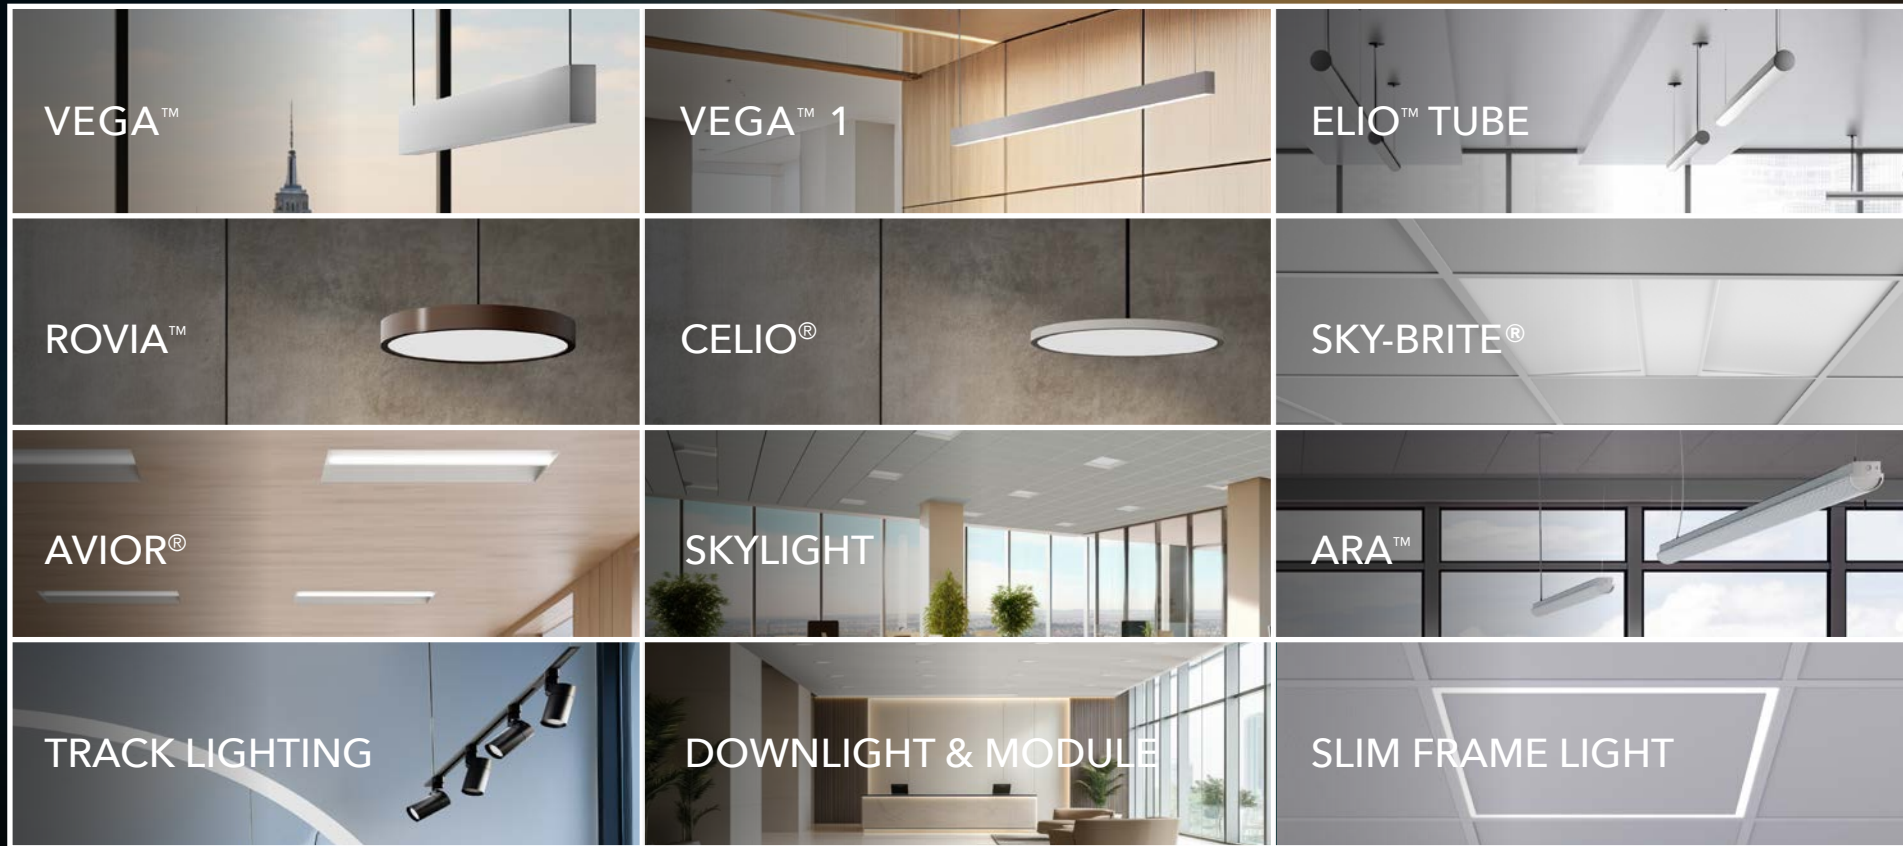



VEGA™
LINEAR ARCHITECTURAL SERIES LED



VEGA™

ARCHITECTURAL LINEAR LED





VEGA™

ARCHITECTURAL LINEAR LED FORMS



VEGATM


ARCHITECTURAL LINEAR LED ACOUSTIC

VEGA™

Direct Lumen Range
Up to 1150 lm/ft

Indirect Lumen Range
Up to 1300 lm/ft

CRI
90+

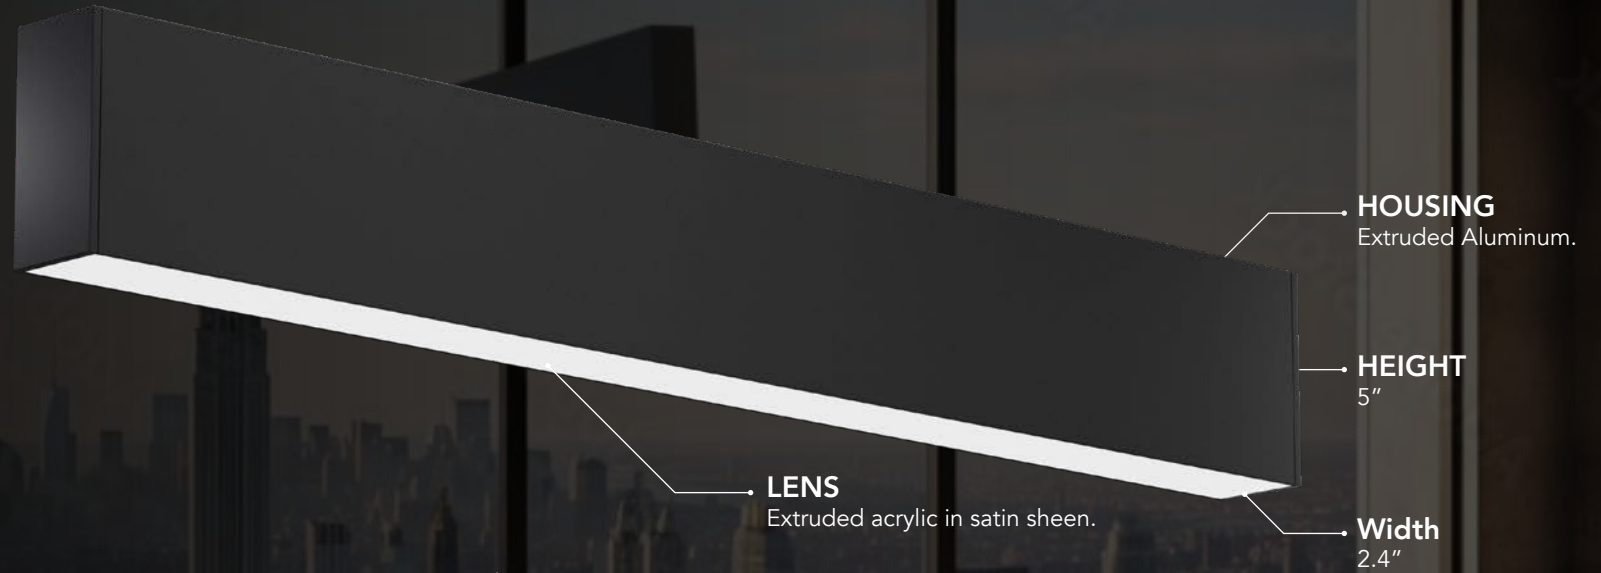

Color Temperature

- 2700K, 3000K, 3500K, 4000K
- 5 Channel Color Tuning
- Static Indirect Color Option

Dimmable

0-10V Dimming standard.
100% Down to 1%

Light-Tight

No light leaks on end cap
or seams.

Uninterrupted Link

Joining brings together the
fixture, thereby averting any
sagging of lens.


Luminaire Level Light Controls

This sensor brings advanced lighting
automation to a whole new level.

10 Yr
Warranty
Available

BAA
Compliant
Available

Directional

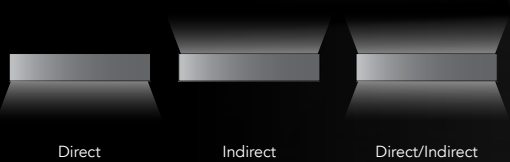


Direct

Indirect

Direct/Indirect

Lens Options

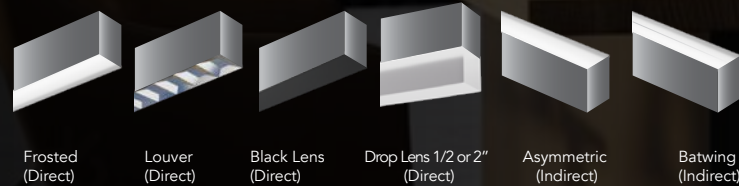

Frosted
(Direct)

Louver
(Direct)

Black Lens
(Direct)

Drop Lens 1/2 or 2"
(Direct)

Asymmetric
(Indirect)

Batwing
(Indirect)

Smart Controls




LUTRON

avion™

enlighted

*Consult factory

Mounting

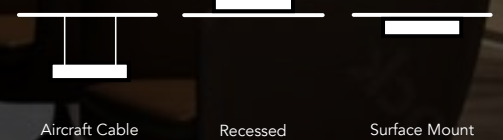

Aircraft Cable

Recessed

Surface Mount

VEGA™




RECESSED OPTIONS



Recessed Flanged



Recessed Flangeless

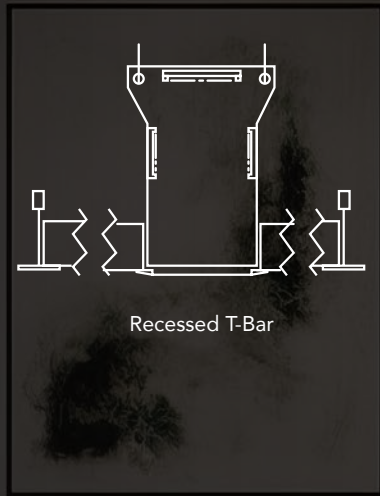

Recessed T-Bar



Mud in Flange




LENGTHS & PROFILE

Choose from standard lengths ranging between 2 and 8 feet, or tailor the customization with precise 1-foot increments, starting from a minimum length of 2 feet.



PROFILE

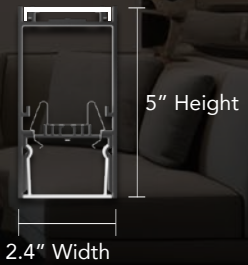


VEGA™



INFINITE
CONFIGURATION




Cube

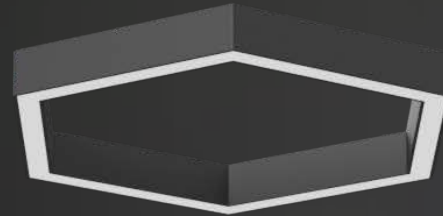


Hex



Chevron

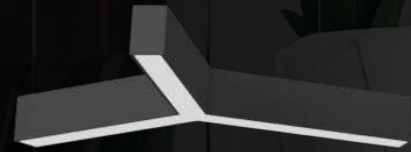

Triad

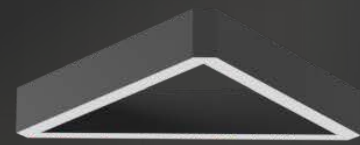

Triangle



X

VEGA™ 1

Direct Lumen Range
Up to 1150 lm/ft

Indirect Lumen Range
Up to 1300 lm/ft

CRI
90+



Color Temperature
• 2700K, 3000K, 3500K, 4000K
• 5 Channel Color Tuning
• Static Indirect Color Option

Dimmable
0-10V Dimming standard.

Light-Tight
No light leaks on end cap or seams.

Uninterrupted Link
Joining brings together the fixture, thereby averting any sagging of lens.

Luminaire Level Light Controls
This sensor brings advanced lighting automation to a whole new level.

10 Yr
Warranty Available

BAA
Compliant Available

Directional

Direct Indirect Direct/Indirect

Lens Options

Frosted (Direct) Louver (Direct) Black Lens (Direct) Drop Lens 1/2 or 2" (Direct) Asymmetric (Indirect) Batwing (Indirect)

Smart Controls

LUTRON
avion **enlighted**

*Consult factory


Mounting

Aircraft Cable Recessed Surface Mount


VEGA™ 1



RECESSED OPTIONS



Recessed Flanged




Recessed Flangeless



LENGTHS & PROFILE

Choose from standard lengths ranging between 2 and 8 feet, or tailor the customization with precise 1-foot increments, starting from a minimum length of 2 feet.

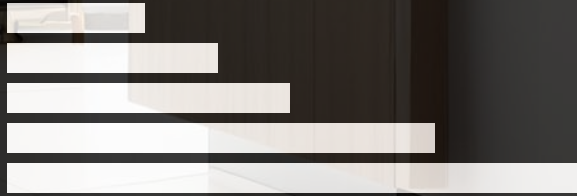


PROFILE



VEGA™

RAL

Refer to RAL catalog for colors.
(Consult with factory)

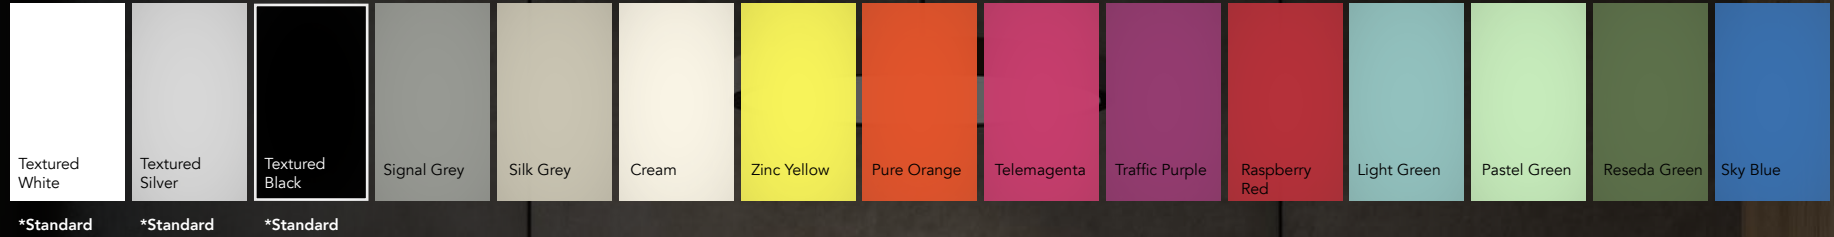

Acoustic Finishes



RGB

Static indirect color options.





roviaTM

LED LUMINAIRE

rovia™

LED LUMINAIRE

Direct Lumen Range
3520 - 17160 lm

Indirect Lumen Range
1760 - 13640 lm

CRI
80+



HOUSING

Housing is two-piece, die-formed, spun aluminum.

HEIGHT

3.7" - 5.2" Based on diameter.

LENS

White acrylic diffuser lens provides soft, ambient illumination.



Color Temperature

- 2700K, 3000K, 3500K, 4000K, 5000K
- Static Indirect Color Option

Dimmable

0-10V Dimming standard
100% Down to 1%

10 Yr

Warranty Available

BAA

Compliant Available

Diameter



- 14"
- 26.3"
- 36.2"
- 47.2"
- 59"

Mounting



Aircraft Cable

Mono-Point Cable

Recessed

Stem Mount

Surface Mount

Output



Direct

Direct/Indirect

Indirect

* Insert made of acoustic material.

rovia™

LED LUMINAIRE

RAL


Refer to RAL catalog for colors.
(Consult with factory)

Gloss White	Matte White	Textured White	Signal Grey	Silk Grey	Cream	Zinc Yellow	Pure Orange	Telemagenta	Traffic Purple	Raspberry Red	Light Green	Pastel Green	Reseda Green	Sky Blue
*Standard	*Standard	*Standard												



Acoustic Finishes

Frost	Sunshine	Ocher	Cinnamon	Rouge	Wine	Orchid	Lavender	Mandarin	Ivy	Jade	Vineyard	Navy	Lime Splice	Olive
Grey	Smoke	Slate	Mushroom	Vanilla	Blush	White	Black	Onyx	Duck Egg	Pistachio	Sage	Pacific	Coronet	Cream



RGB

Static indirect color options.

Violet	Royal Blue	Blue	Cyan	Green	PC Lime	PC Mint	Amber	PC Amber	Red-Orange	PC Red-Orange	Red	Photo Red	Far Red	PC Purple

CELIO[®]

ROUND EDGE-LIT LED



CELIO

ROUND EDGE-LIT LED


Direct Lumen Range
1800 - 11000 lm

Indirect Lumen Range
700 - 4700 lm

CRI
80+, 90+ Optional



<p>Color Temperature Tone-Selectable, switch between 3000K - 3500K - 4000K CCT.</p>	<p>Dimmable 0-10V Dimming standard, 100% Down to 1%</p>
--	--

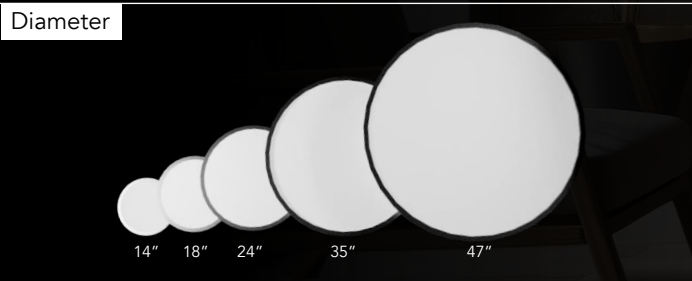



ELIOTM TUBE

ELIO™ TUBE

Up to
1200 lm/ft

CRI
80+

HOUSING

Extruded T5-6063 Aluminum with a clear anodized finish.

DIAMETER

2.5" Dia.

LENS

Acrylic blend with 80% transmissivity, designed with a snap-fit into the housing.



Color Temperature

- 2700K, 3000K, 3500K, 4000K
- 5 Channel Color Tuning
- Static Color Option

Dimmable

0-10V Dimming standard,
100% Down to 1%

10 Yr

Warranty Available


BAA

Compliant Available


Length



Mounting

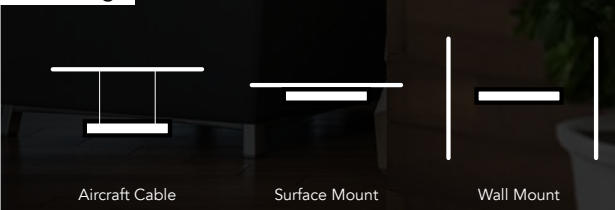

Finish

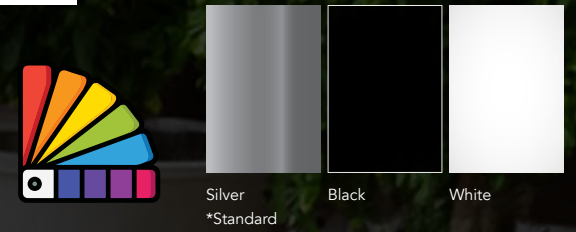

RGB



Option





SKY-BRITE[®]

LOW GLARE UGR <19 VOLUMETRIC

SKY-BRITE®

LOW GLARE UGR <19 VOLUMETRIC

Lumen Range

1875 - 8750 lm

CRI

80+, 90+ Optional



Dimmable

0-10V Dimming standard,
100% Down to 10%

Color Temperature



Tone-Select™

Select between 3000K, 3500K, and 4000K in the field by simply switching an easily accessible three position switch. Fixture comes set/standard at 40K.

Configuration/Size



2 X 2



2 X 4



1 X 4

Smart Controls



LUTRON


avion™

enlighted

*Consult factory

LENS

Micro-prismatic lens delivers a Unified Glare Rating (UGR) <19.



UNIFORM ILLUMINATION

Light emitting surfaces are back-lit acrylic for uniform illumination.



10 Yr

Warranty Available

AVIOR[®]

Lumen Range
2385 - 6189 lm

CRI
80+

LENS

Linear acrylic lens manages the balance of efficiency and aesthetics.

UNIFORM ILLUMINATION

Linear arrayed LED modules provide soft, but effective illumination.



Dimmable

0-10V Dimming standard,
100% Down to 10%


Color Temperature




Tone-Select™

Select between 3500K, 4000K, and 5000K in the field by simply switching an easily accessible three position switch. Fixture comes set/standard at 40K.

Configuration/Size



2 X 2



2 X 4

Optional




- Emergency Battery
- PIR Sensor
- Sensor Adapter



SKYLIGHT

SKYLIGHT

Lumen Range
2750 - 5550 lm

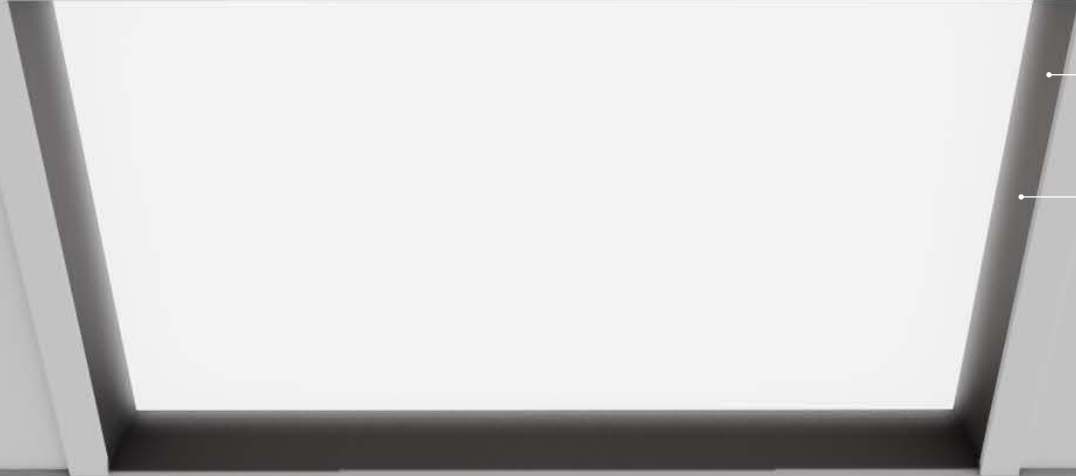

SKYLIGHT EFFECT
1.75" Regress, Reduces glare and breaks up the visual monotony of a Suspended T Bar Ceiling.

HOUSING
Aluminum extrusion.




Color Temperature
2700K, 3000K, 3500K, 4000K


10 Yr
Warranty Available

BAA
Compliant Available

Configuration/Size

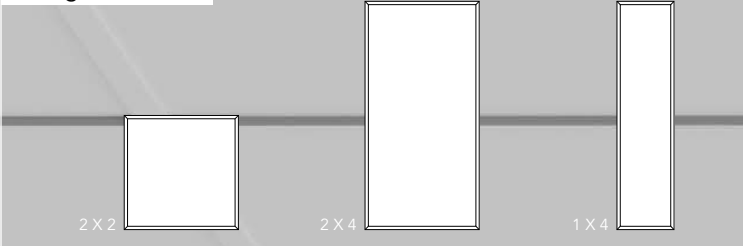

Mounting Type

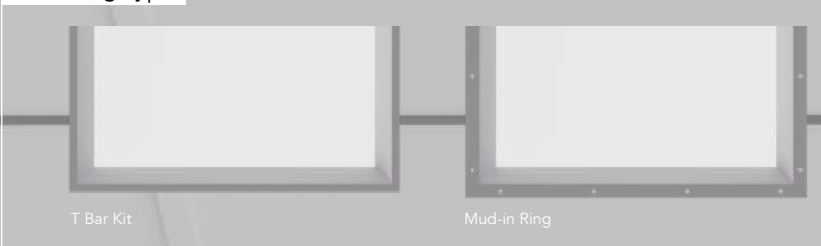

Finish




ARA™

ARA™

Lumen Range
2860 - 11700 lm

CRI
80+

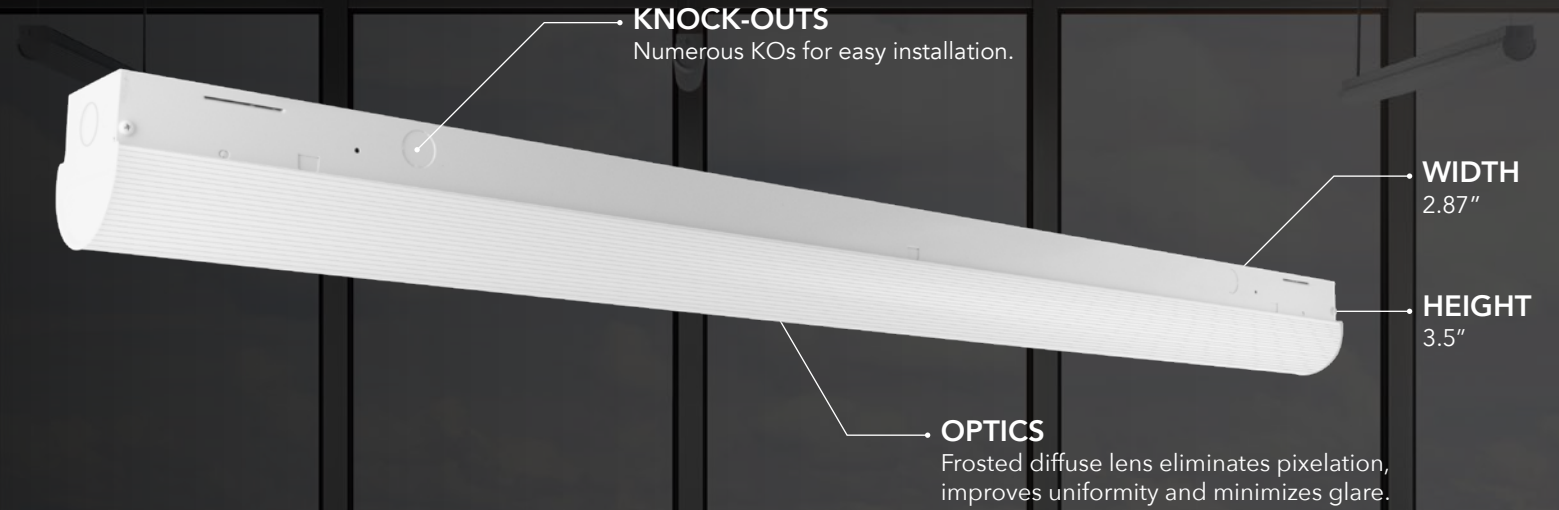

Dimmable

0-10V Dimming standard
100% down to 10%

Color Temperature



Tone-Select™

Select between 3500K, 4000K, and 5000K in the field by simply switching an easily accessible three position switch. Fixture comes set/standard at 40K.

Length



Optional



Optional

- Emergency Battery
- Motion Sensor



10 Yr
Warranty
Available

BAA
Compliant
Available



DESIGNER TRACK LIGHTING

DESIGNER TRACK LIGHTING

Premium Track Lumen Range
945 - 11885 lm

Geometric Track Lumen Range
1518 - 9115 lm

CRI
80+, 90+ Optional

COMPACT DESIGN

Sleek, compact design with integrated driver for a clean look.

SMART MAGNET SYSTEM

Secure connection between the fixture base and driver box.



Color Temperature

Premium: 2700K, 3000K, 3500K, 4000K.
Geometric: 2700K, 3000K, 3500K, 4000K, 5000K



Dimmable

Premium: Triac or Built-in
Geometric: Triac

10 Yr
Warranty
Available

Collection



Fixed Beam



Zoomable Beam



Fixed & Wall Washing Beam

PREMIUM TRACK LIGHTING




Zoomable



Fixed Beam

GEOMETRIC TRACK LIGHTING

Pinpoint Lighting




Adjustability

- 360° Horizontal Rotation
- 90° Vertical Tilt

Finish



White



Black



Silver

ARCHITECTURAL MODULE


ARCHITECTURAL
MODULE

3" Lumen Range
800 - 1250 lm

4" Lumen Range
1490 - 2165 lm

5" Lumen Range
2545 - 3145 lm

CRI
80+, 90+ Optional

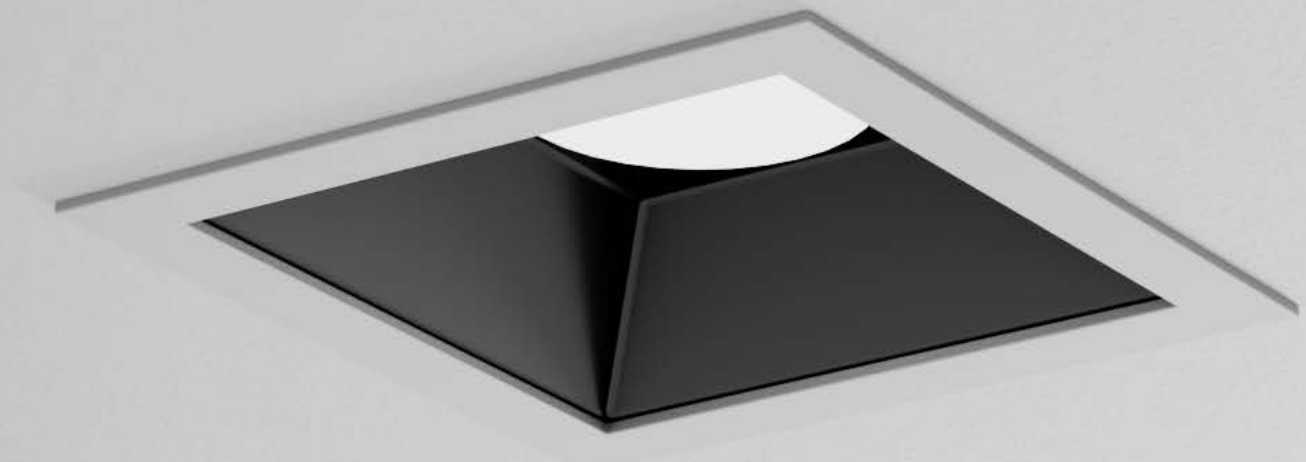

Color Temperature

2700K, 3000K, 3500K, 4000K



Dimmable

0-10V Dimming Standard



Tool-free

LED Modules, Mounting Rings, Beam Lenses, and Accessories can be change in the field.

10 Yr
Warranty
Available

Aperture Size/Output



3"
10W, 15W




4"
20W, 25W



5"
30W, 35W


Customizable

Optics



15°

24°



38°

55°

Trim Color



Black

White



Silver

Reflector



Black

Matte White



Matte Silver

Silver

Filter



Honeycomb




Soft Lens

Versatile Installation



Driver (Standard)



Construction Plate



IC-Rated Housing

A modern office lobby featuring a long, low reception desk with a light-colored marble top and a warm, glowing backlit wall. The ceiling is white with numerous recessed circular downlights. The floor is highly reflective, mirroring the ceiling and furniture. To the right, there is a seating area with two beige armchairs on a dark rug. Large windows on the far right provide natural light. On the left, a dark wall features two potted plants. The overall atmosphere is clean, professional, and well-lit.

ARCHITECTURAL DOWNLIGHT

ARCHITECTURAL
DOWNLIGHT

4" Lumen Range
1700 - 2050 lm

5" Lumen Range
2590 - 3020 lm

6" Lumen Range
3795 - 4160 lm

CRI
80+, 90+ Optional



Color Temperature
2700K, 3000K, 3500K, 4000K, 5000K



Dimmable
0-10V Dimming standard



Tool-free
Easily change reflectors in the field to adjust lighting aesthetics.

10 Yr
Warranty Available

Aperture Size



Customizable

Optics



Trim Color



Reflector



Versatile Installation



Driver



Construction Plate

SLIM FRAME LIGHT

SLIM FRAME LIGHT

2' X 2' Lumen Range
2500 - 5000 lm

2' X 4' Lumen Range
5000 - 7500 lm

CRI
80+



Dimmable

0-10V Dimming standard




Premium Build

Durable white-finished frame
suitable for grid ceilings.



Wattage & Color Temperature



Spec-Select™

Select between five adjustable wattage and five color temperatures in the field by simply switching an easily accessible five position switch. Fixture comes set/standard at 40K.

Size



2 X 2



2 X 4



CHRONOS[®]

AREA LIGHT

CHRONOS[®]

AREA LIGHT

14" Lumen Range
3120 - 17930 lm

22" Lumen Range
20040 - 35960 lm

CRI
70+, 95 Optional



HOUSING

Die cast aluminum housing and front frame, integral heat sinking and driver compartment.

OPTICS

Ensure maximum lumen output and beam uniformity with rotatable optics, featuring Ledil optics for superior performance.

10 Yr

Warranty
Available




Color Temperature

- 3000K, 3500K, 4000K, 5000K
- Amber



Dimmable

0-10V Dimming Standard,
10% to 100%



Ready, Set, Control

- NEMA photocell
- Motion Sensor
- 3-Pin (standard),
- 7-Pin available upon request



Rotatable Optics


The optics lens, equipped with rotational capabilities, enables directional lighting.

CHRONOS[®]


AREA LIGHT

Optics

DISTRIBUTION TYPE

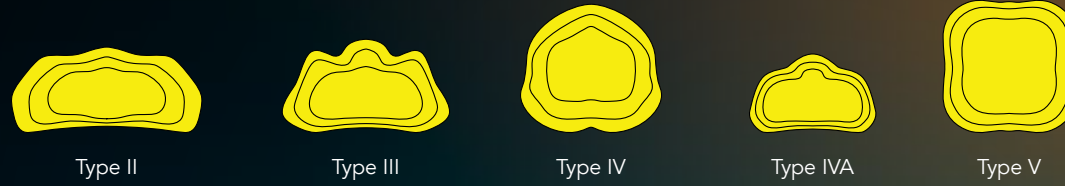

NEMA

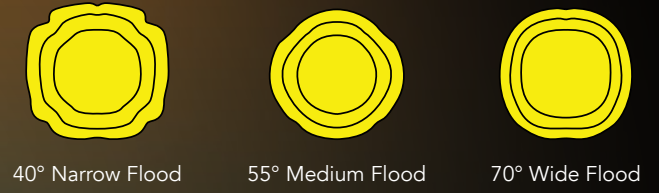

Mounting



Finishes
Please refer to RAL catalog for additional colors.
(Consult with factory)



*Standard

ACCESSORIES POLE

SQUARE STRAIGHT STEEL POLE

w/ Base cover included



4" & 5" widths,
11 Ga. wall thickness



Guaranteed
match fixture color

<p>Height</p> <p>12' - 30'</p>	<p>Optional Electrical Box</p> <p>Box only GFI w/ cover *Consult factory</p>
<p>Mounting Configuration</p> <p>1 2 @ 90° 2 @ 180° 3 @ 90° 4 @ 90°</p>	<p>Finish</p> <p>Bronze finish standard, Custom RAL colors available.</p>

CHARITIES WE SUPPORT

PQL Supports Casa Pacifica

For over 8 years PQL has supported Casa Pacifica during the holiday season. Casa Pacifica offers adolescent and family services to treat victims of abuse and neglect, substance abuse, homelessness, and other mental health issues. They have 3 campuses located in Camarillo, Santa Barbara, and Santa Maria and work with more than 2,000 of the most vulnerable children and their families annually.

During their holiday toy drive, each of the campus children wish for a total of five presents for their holiday gifts – 3 “needs” and 2 “wants” Typically, the needs are items like clothing, bedding, special hygiene products, and toiletries. Their wants are generally fun items such as shoes, makeup, toys, or gift cards. PQL has donated over 400 gifts to Casa Pacifica year to date.



CHARITIES WE SUPPORT

James Storehouse

James Storehouse is a local non-profit who supports children in foster care, youth aging-out of foster care, children who have been commercially sexually exploited, children "at risk" of removal, and all their families.

Every year PQL holds a donation drive for their "Back to School Bash" which is a free shopping event for over 674 foster youth and teens in our county. Our goal is to donate at least 20-25 backpacks with supplies.



The logo for M2O Architectural features the letters 'M2O' in a large, stylized font. The 'M' is a dark teal color, while the '2' and 'O' are a lighter, golden-brown color. Below the 'M2O' is the word 'ARCHITECTURAL' in a smaller, dark teal, sans-serif font. A registered trademark symbol (®) is located to the right of the 'O'. The background is a dark gradient with a subtle glow behind the logo.

Thank You!