

The logo features the letters 'M20' in a large, white, stylized font. The 'M' is composed of two sharp, upward-pointing triangles. The '2' is a thick, curved shape that overlaps the 'M'. The '0' is a large, white, circular ring. Below this, the word 'ARCHITECTURAL' is written in a white, uppercase, sans-serif font. A small 'TM' trademark symbol is positioned to the right of the '0' in 'M20'.

M20TM
ARCHITECTURAL



Manufacturer With Over 35 Years' Experience

Since 1989, PQL, a U.S.-based company, has specialized in innovative, eco-friendly lighting across various sectors like commercial, industrial, institutional, and healthcare markets. Recently, architectural lighting has seen significant evolution, prompting PQL to introduce the M20™ Architectural lineup. These top-quality luminaires are fully customizable for each project's unique needs. Our Architectural line caters to lighting professionals, offering diverse options, precise controls, and solutions meeting industry standards. With our dedicated product development team constantly innovating, our architectural luminaires provide flexibility for precise adjustments to fit your project's specifications.

Corporate HQ

Simi Valley, California

Office/Engineering

Fargo, North Dakota
Burlington, Iowa

Distribution Center

Simi Valley, California
San Diego, California
Minneapolis, Minnesota
Homewood, Illinois

Manufacturing

Baja California, Mexico
Asia-Pacific (APAC)



INTERIOR
ARCHITECTURAL



EXTERIOR
ARCHITECTURAL

INTERIOR ARCHITECTURAL





VEGA™ SERIES



VEGA™

ARCHITECTURAL LINEAR LED





VEGATM

ARCHITECTURAL FORMS

VEGATM

ARCHITECTURAL ACOUSTIC




VEGA™

Direct Lumens Range

up to **1150 lm/ft**

Indirect Lumens Range

up to **1300 lm/ft**

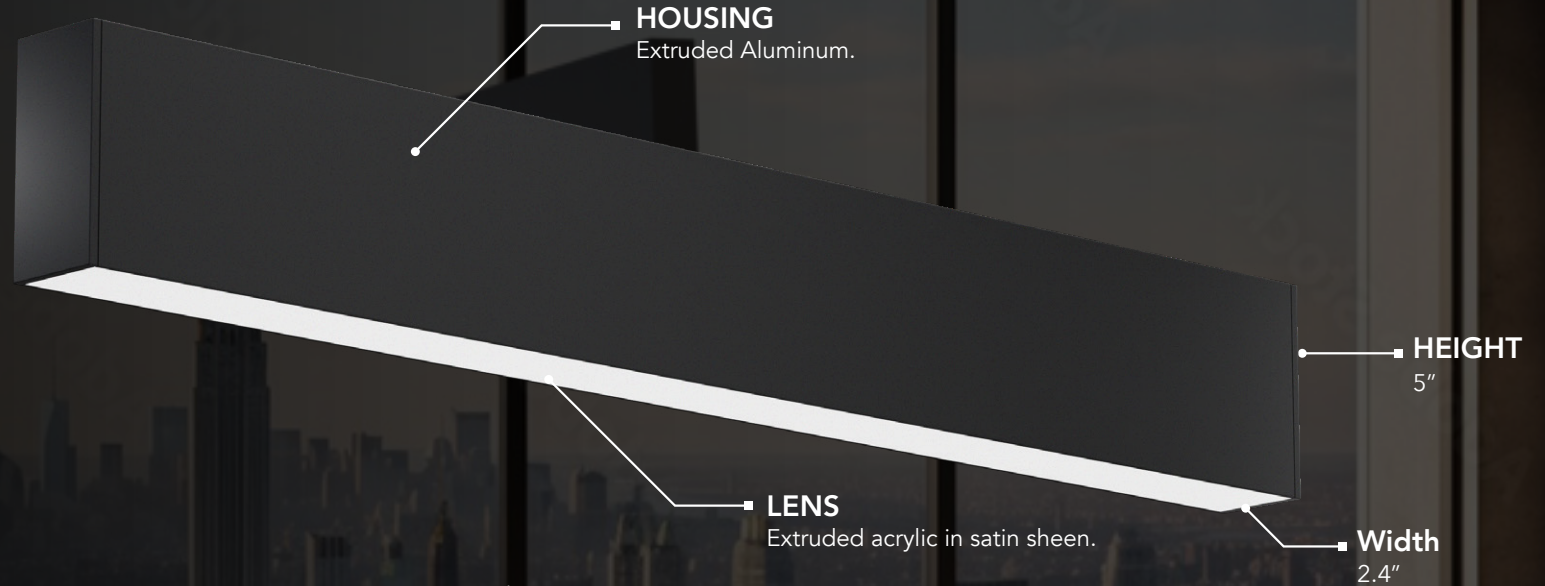

Color Temperature

- 2700K, 3000K, 3500K, 4000K
- 5 Channel Color Tuning
- Static Indirect Color Option

Dimmable

0-10V Dimming standard.

Light-Tight

No light leaks on end cap or seams.

Uninterrupted Link

Joining brings together the fixture, thereby averting any sagging of lens.

Luminaire Level Lighting Controls

This sensor brings advanced lighting automation to a whole new level.


10 Yr

Warranty Available


BAA

Compliant Available

Directional

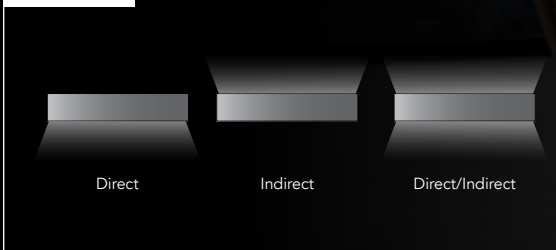


Lens Options

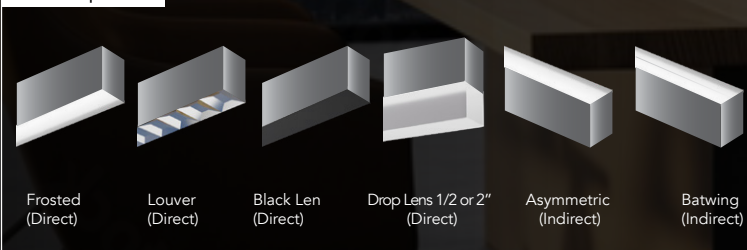

Smart Controls



Form Factor

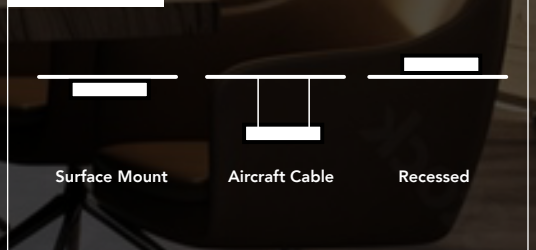

VEGA™




RECESSED OPTIONS



Recessed Flanged



Recessed Flangeless

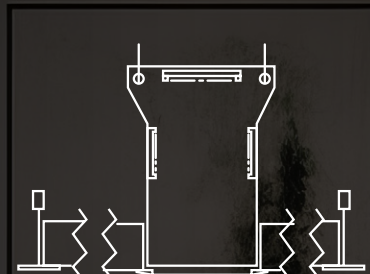

Recessed T-Bar



Mud in Flange




LENGTHS & PROFILE

Choose from standard lengths ranging between 2 and 8 feet, or tailor the customization with precise 1-foot increments, starting from a minimum length of 2 feet.




PROFILE




VEGA™



INFINITE
CONFIGURATION

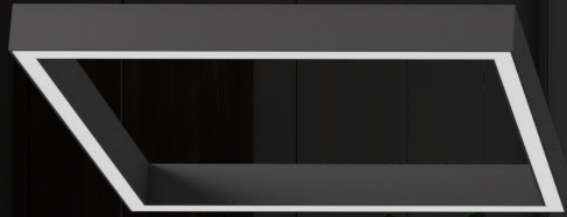

Cube

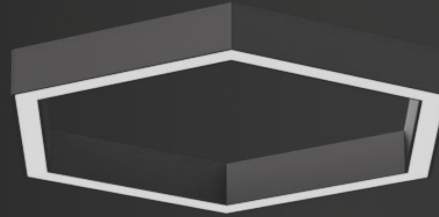


Hex



Chevron



Triad



Triangle




X

VEGA™ 1

Direct Lumens Range
up to 1150 lm/ft

Indirect Lumens Range
up to 1300 lm/ft

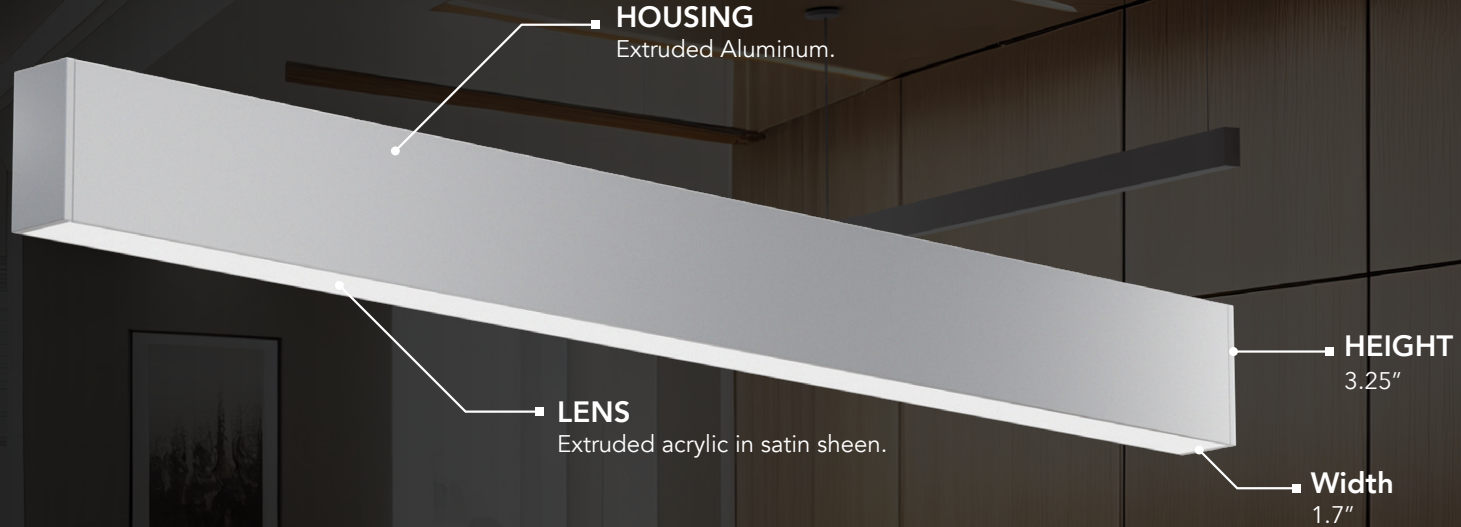

Color Temperature

- 2700K, 3000K, 3500K, 4000K
- 5 Channel Color Tuning
- Static Indirect Color Option

Dimmable

0-10V Dimming standard.

Light-Tight

No light leaks on end cap or seams.

Uninterrupted Link

Joining brings together the fixture, thereby averting any sagging of lens.

Luminaire Level Lighting Controls

This sensor brings advanced lighting automation to a whole new level.

10 Yr

Warranty Available

BAA


Compliant Available

Directional

Lens Options

Smart Controls

Form Factor

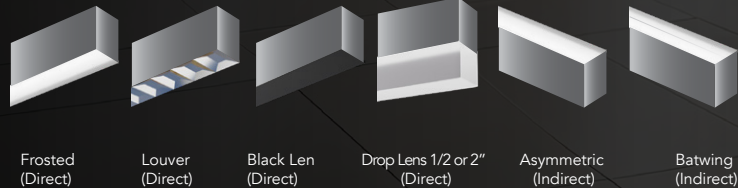


LUTRON

avion™

enlighted


*Consult factory




VEGA™ 1




RECESSED OPTIONS



Recessed Flanged




Recessed Flangeless



LENGTHS & PROFILE

Choose from standard lengths ranging between 2 and 8 feet, or tailor the customization with precise 1-foot increments, starting from a minimum length of 2 feet.

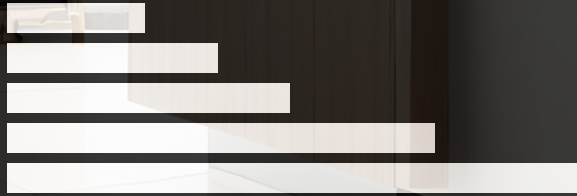

PROFILE



VEGA™

RAL

Refer to RAL catalog for colors.
(Consult with factory)



*Standard *Standard *Standard



Acoustic Finishes



RGB

Static indirect color options.



rovia™

LED LUMINAIRE




rovia™

LED LUMINAIRE

Lumen Range
500 lm - 28000 lm

CRI
80+, 90+ optional

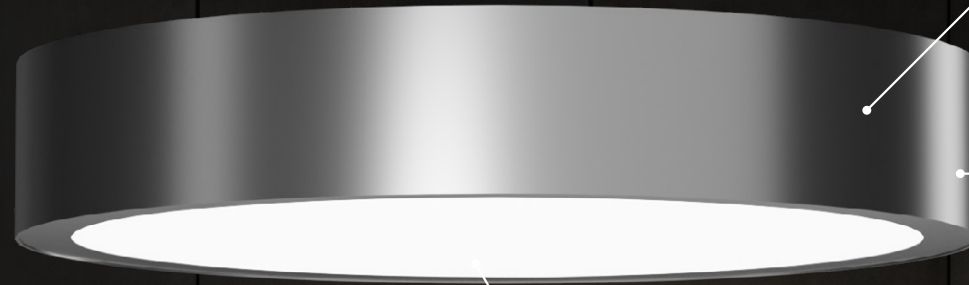

HOUSING

Housing is two-piece, die-formed, spun aluminum.

HEIGHT

3.7" - 5.2" Based on diameter.

LENS

White acrylic diffuser lens provides soft, ambient illumination.



Color Temperature

- 2700K, 3000K, 3500K, 4000K, 5000K
- Static Indirect Color Option


Dimmable

0-10V Dimming standard
100% Down to 1%

10 Yr
Warranty Available

BAA
Compliant Available

Diameter

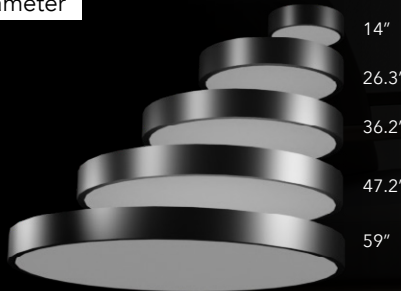

- 14"
- 26.3"
- 36.2"
- 47.2"
- 59"

Mounting



Mono-point cable

Aircraft cable

Stem Mount

Recessed

Surface Mount

Outputs



Direct

Direct/Indirect

Indirect

* Insert made of acoustic material.

rovia™

LED LUMINAIRE

RAL


Refer to RAL catalog for colors.
(Consult with factory)



*Standard *Standard *Standard




Acoustic Finishes




RGB

Static indirect color options.

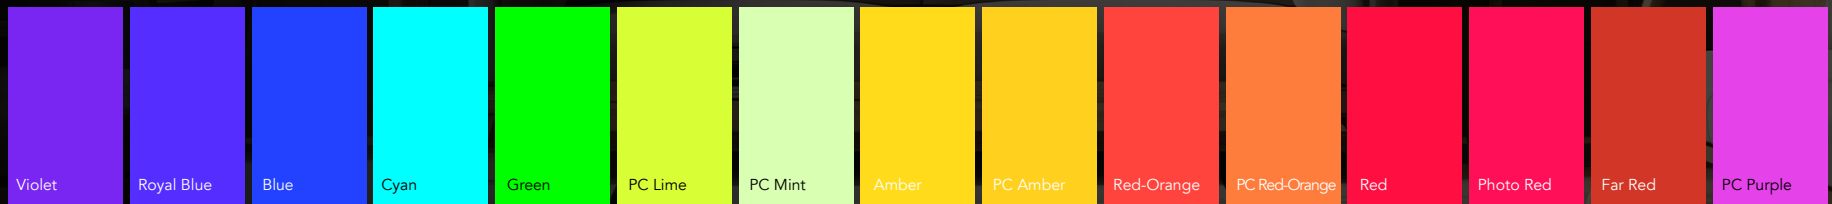

CELIO™

ROUND EDGE-LIT LED



CELIO™

ROUND EDGE-LIT LED

Lumen Range
1800 lm - 11000 lm

CRI
82+




Color Temperature

Tone-Selectable, switch between
3000K - 3500K - 4000K CCT.

Dimmable

0-10V Dimming standard,
100% Down to 1%

Diameter

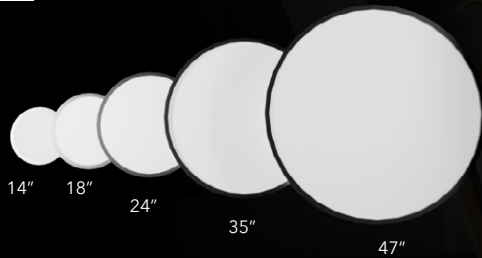

Mounting

Surface Mount

Aircraft cable

Stem Mount

Output

Direct

Direct/Indirect



10 Yr
Warranty
Available



ELIOTM TUBE

ELIO™ TUBE

up to 1200 lm/ft

CRI
90+



Color Temperature <ul style="list-style-type: none">• 2700K, 3000K, 3500K, 4000K• 5 Channel Color Tuning	Dimmable <p>0-10V Dimming standard, 100% Down to 1%</p>
--	--



HOUSING
Extruded T5-6063 Aluminum with a clear anodized finish.

Diameter
2.5" Dia.

LENS
Acrylic blend with 80% transmissivity, designed with a snap-fit into the housing.

10 Yr
Warranty Available

BAA
Compliant Available

Length	Mounting	Finish	Option
---------------	-----------------	---------------	---------------



SKY-BRITE[®]

LOW GLARE UGR <19 VOLUMETRIC

SKY-BRITE®

LOW GLARE UGR <19 VOLUMETRIC

up to 4950 lm



Dimmable

0-10V Dimming standard,
100% Down to 10%

Directional



Tone-Select™

Select between 4000K, 3500K, and 3000K in the field by simply switching an easily accessible three position switch. Fixture comes set/standard at 40K.


Configuration/Size



2X2



2X4



1X4

LENS

Micro-prismatic lens delivers a Unified Glare Rating (UGR) <19.

UNIFORM ILLUMINATION

Light emitting surfaces are back-lit acrylic for uniform illumination.



10 Yr

Warranty Available

AVIOR™

AVIOR™

Lumen Range
2385 lm - 6189 lm

CRI
80+



Dimmable

0-10V Dimming standard,
100% Down to 10%

Color Temperature




Tone-Select™

Select between 3500K, 4000K, and 5000K in the field by simply switching an easily accessible three position switch. Fixture comes set/standard at 40K.

Configuration/Size



2X2



2X4

Optional



- Emergency Battery
- PIR Sensor
- Sensor Adapter

LENS

Linear acrylic lens manages the balance of efficiency and aesthetics.

UNIFORM ILLUMINATION

Linear arrayed LED modules provide soft, but effective illumination.

10 Yr


Warranty Available

SKYLIGHT

BEZEL FRAME KIT

SKYLIGHT

BEZEL FRAME KIT

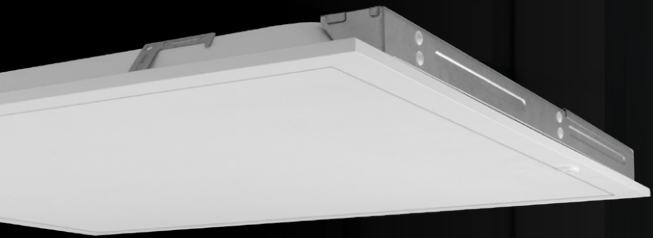

Compatible with





HOUSING
Aluminum extrusion.

SKYLIGHT EFFECT
1.75" Regress, Reduces glare and breaks up the visual monotony of a Suspended T Bar Ceiling.

10 Yr
Warranty Available

BAA
Compliant Available

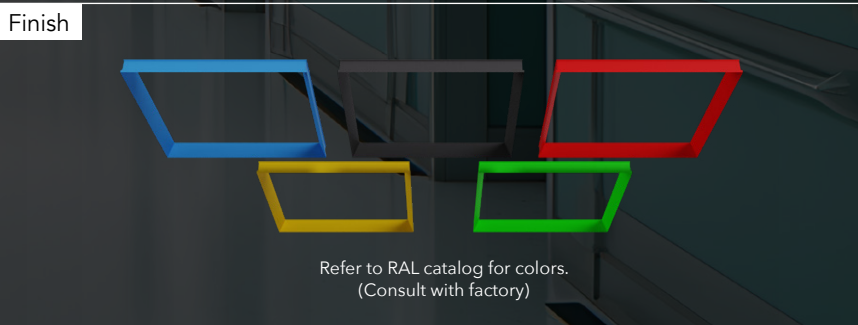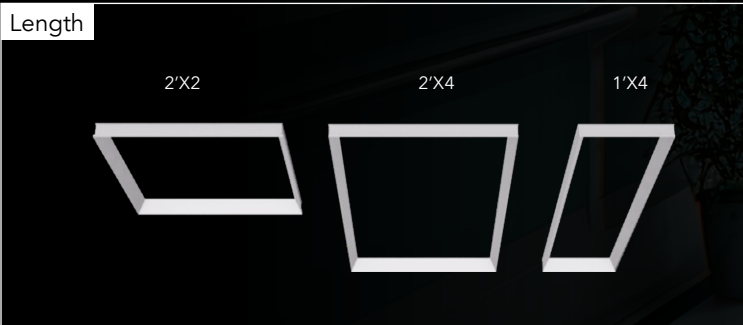


ARA™

ARA™

Lumen Range
2860 lm - 11700 lm

CRI
80+

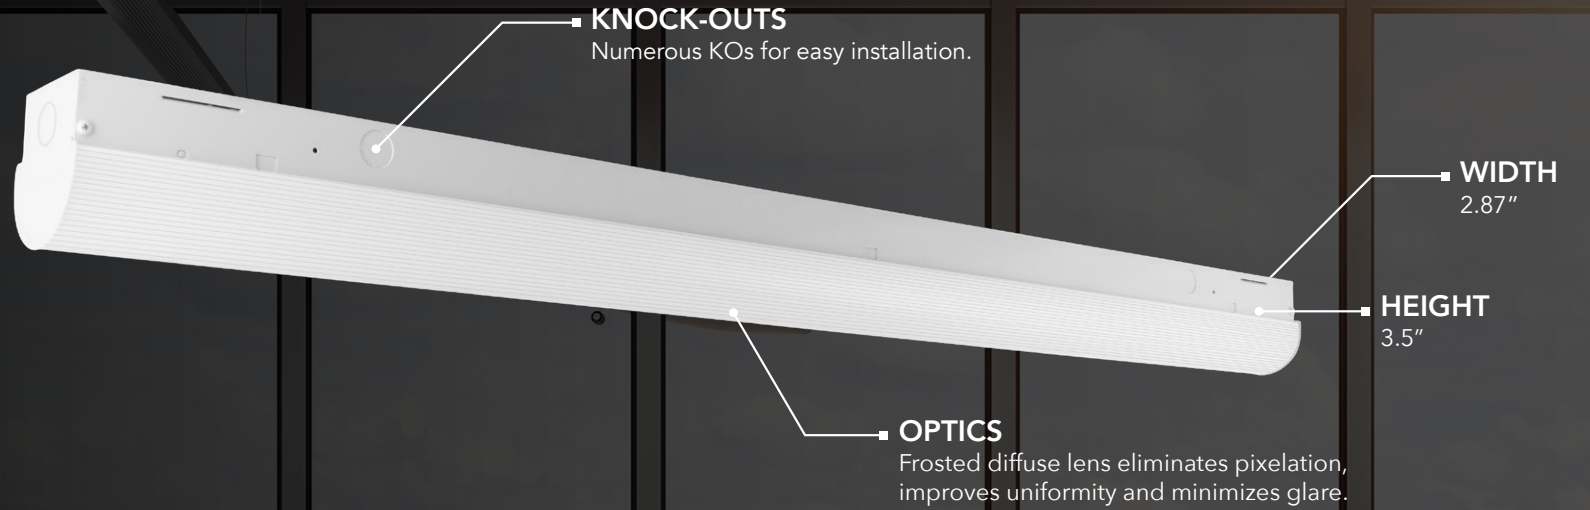

10 Yr
Warranty Available

BAA
Compliant Available

Color Temperature



Tone-Select™

Select between 3500K, 4000K, and 5000K in the field by simply switching an easily accessible three position switch. Fixture comes set/standard at 40K.

Diameter



Dimmable

0-10V Dimming Standard,
100% down to 10%.



Optional

- Emergency Battery
- Motion Sensor



CHRONOS™

AREA LIGHT

CHRONOS™

AREA LIGHT

Lumen Range

3100 lm - 35960 lm

CRI

70+



HOUSING

Die cast aluminum housing and front frame, integral heat sinking and driver compartment.

OPTICS

Maximum lumen output while ensuring beam uniformity also available in rotatable optics.

10 Yr

Warranty
Available



Color Temperature

- 3000K, 3500K, 4000K, 5000K
- Amber



Dimmable

0-10V Dimming Standard,
10% to 100%



Ready, Set, Control

- NEMA photocell
- Motion Sensor
- 3-Pin (standard),
- 7-Pin available upon request



Rotatable Optics

The optics lens, equipped with rotational capabilities, enables directional lighting.

FEATURES **OPTICS**

DISTRIBUTION TYPE



Type II



Type III



Type IV



Type IVA



Type V

NEMA



40° Narrow Flood



55° Medium Flood



70° Wide Flood

ACCESSORIES **MOUNTING**



Large Yoke Mount



Yoke Mount



Slip Fitter



Pole Mount



Round Pole Mount Adapter



Pole Mounting Arm Adapter



Wall Bracket Adapter

FINISHES **CUSTOM**



Finishes
Please refer to RAL catalog for additional colors.
(Consult with factory)

Bronze	Pure White	Light Grey	Agate Grey	Signal Grey	Silk Grey	Cream	Zinc Yellow	Pure Orange	Telemagenta	Traffic Purple	Raspberry Red	Light Green	Pastel Green	Reseda Green	Sky Blue
--------	------------	------------	------------	-------------	-----------	-------	-------------	-------------	-------------	----------------	---------------	-------------	--------------	--------------	----------

*Standard

ACCESSORIES POLE

SQUARE STRAIGHT STEEL POLE

w/ Base cover included




4" & 5" widths,
11 Ga. wall thickness



Guaranteed
match fixture color

Height

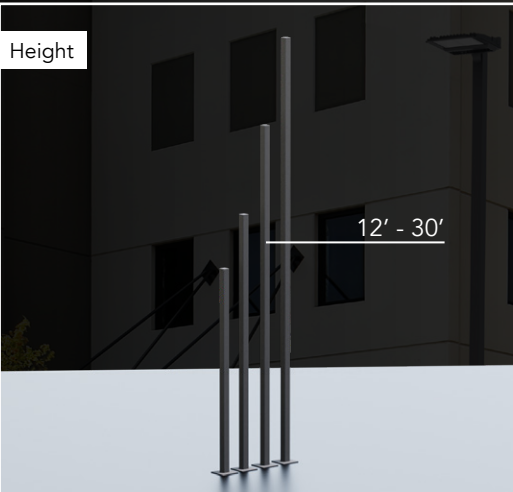

12' - 30'

Optional Electrical Box



Box only



GFI w/ cover

*Consult factory

Mounting Configuration



1

2 @ 90°

2 @ 180°

3 @ 90°

4 @ 90°

Finish



Bronze finish standard,
Custom RAL colors available.

CHARITIES WE SUPPORT

PQL Supports Casa Pacifica

For over 8 years PQL has supported Casa Pacifica during the holiday season. Casa Pacifica offers adolescent and family services to treat victims of abuse and neglect, substance abuse, homelessness, and other mental health issues. They have 3 campuses located in Camarillo, Santa Barbara, and Santa Maria and work with more than 2,000 of the most vulnerable children and their families annually.

During their holiday toy drive, each of the campus children wish for a total of five presents for their holiday gifts – 3 “needs” and 2 “wants” Typically, the needs are items like clothing, bedding, special hygiene products, and toiletries. Their wants are generally fun items such as shoes, makeup, toys, or gift cards. PQL has donated over 400 gifts to Casa Pacifica year to date.



CHARITIES WE SUPPORT

James Storehouse

James Storehouse is a local non-profit who supports children in foster care, youth aging-out of foster care, children who have been commercially sexually exploited, children "at risk" of removal, and all their families.

Every year PQL holds a donation drive for their "Back to School Bash" which is a free shopping event for over 674 foster youth and teens in our county. Our goal is to donate at least 20-25 backpacks with supplies.



The logo for M2O Architectural features the letters 'M2O' in a large, stylized font. The 'M' is a dark teal color, while the '2' and 'O' are a lighter, golden-brown color. Below the 'M2O' is the word 'ARCHITECTURAL' in a smaller, dark teal, sans-serif font. A small 'TM' trademark symbol is located to the right of the 'O'. The background is a dark gradient with a subtle glow behind the logo.

Thank You!

TM

ARCHITECTURAL